

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
18.09.2002 Bulletin 2002/38

(51) Int Cl.7: H04Q 7/32, H04B 1/40

(21) Application number: 02251659.5

(22) Date of filing: 08.03.2002

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Stockhusen, Dirk
San Diego, CA 92129 (US)

(74) Representative: Wilding, Frances Ward
Haseltine Lake & Co
Imperial House
15-19 Kingsway
London WC2B 6UD (GB)

(30) Priority: 15.03.2001 US 276373 P
06.08.2001 US 923633

(71) Applicant: Siemens Information and
Communication Mobile LLC
San Diego, CA 92127 (US)

(54) Control of a multi-mode, multi-band mobile telephone via a common man machine interface (MMI)

(57) A system for controlling a multi-mode mobile telephone (100 & 110) via a single hardware and software man machine interface (MMI) (118) includes a mode manager for managing switching of the system (200 & 210) between two or more modes utilizing different air interface standards supported by different protocol stacks. A user interface communicates information

and commands between the protocol stacks and a user. An application layer reduces the functional interface between the protocol stacks to layers of the protocol stacks subsequent to the user interface, allowing control of the mobile telephone (100 & 110) to be provided via a single man machine interface (118) that is substantially consistent across the all modes.

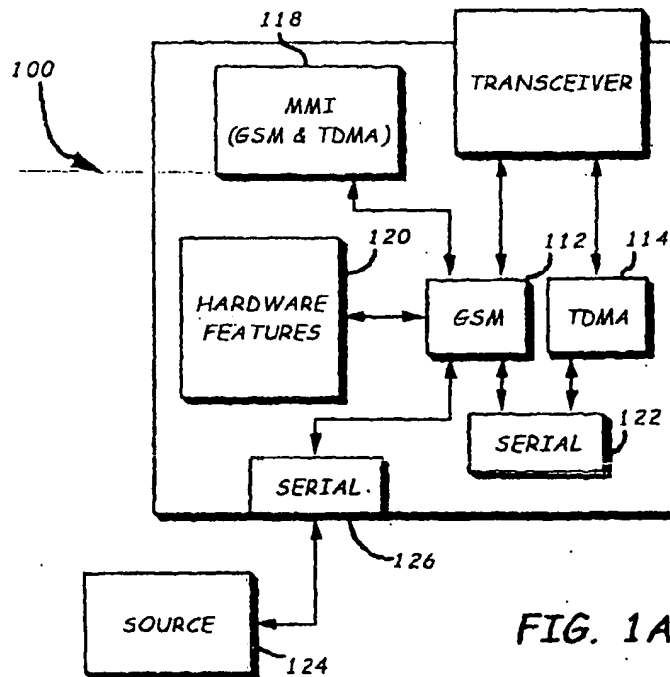


FIG. 1A

[0026] Mode manager 238 manages switching of mobile telephone operation between air interfaces supported by MSSW protocol stacks 212 & 214. For example, in the embodiment shown, mode manager 238 controls switching between a first mode utilizing the GSM air interface standard supported by first protocol stack 212 ("GSM mode") and a second mode utilizing the TDMA air interface standard supported by a second protocol stack 214 ("TDMA mode"). Mode manager 238 may further include a routing mechanism ("Router") for routing of information and messages to the selected protocol stack 212 or 214, and a translator ("MMI Manager") for translation of information between the different air interface standards, optionally, including mapping of differences in format of the parameters used by the different technologies and making adaptations for different handling of those parameters. Translation of information between the different air interface standards may alternately be provided by application layer 236.

[0027] In FIGS. 2A and 2B, mode manager 238 is shown as being integrated in GSM MSSW protocol stack 212. However, it is contemplated that mode manager 238, which is preferably a single entity, may alternately be implemented as part of TDMA MSSW protocol stack 214. Further, it will be appreciated that in mobile telephones employing multiple core architectures, mode manager 238 may be implemented in any of the various protocol stacks supporting a given standard.

[0028] The software system or protocol stack 212 supporting mode manager 238 may control a database providing storage of all user relevant data for use by both software systems. Such user relevant data may include, but is not limited to, address book and phone book entries, short messages (e.g., an SMS message, or the like), emails, ringing tones, and pictures. Additionally, a second database may be provided for storing call-related data. In exemplary embodiments, this second database may be implemented as an entity with mode manager 238. However, such a second database may be implemented as multiple entities in each MSSW protocol stack 212 & 214, depending on the requirements of the software system design. The software system or protocol stack 212 supporting mode manager 238 further include a library ("GLOBAL SUPPORT LIBRARY") 240 contains software modules (e.g., math.c or the like) utilized in different software entities of architectures 200 & 210.

[0029] As shown in FIG. 2A, TDMA MSSW protocol stack 214 may include a router 242 for routing information and messages within the TDMA protocol stack 214 and for routing messages from the TDMA protocol stack 214 to the GSM MSSW protocol stack 212. This router 242 is not needed in single core architecture 210 (FIG. 2B).

[0030] In dual core architecture 200 (FIG. 2A), a bridge 244 may be provided for enabling routing of information and messages between GSM MSSW protocol stack 212 and TDMA MSSW protocol stack 214 via se-

rial connection 122 since protocol stacks 212 & 214 are running on different hardware systems, i.e., different chipsets 112 & 114 as shown in FIG. 1A. Bridge 244 may include one or more processes 246 & 248 running within each MSSW protocol stack 212 & 214 which provide for transfer of MMI related information and GSM Layer 1 commands. Processes 246 & 248 establish a communication channel between the GSM and TDMA protocol stacks 212 & 214 allowing communication there between for the display of TDMA call specific user information, and for sending user requests from the GSM protocol stack 212 to the TDMA protocol stack 214. Wherein the MSSW protocol stacks 212 & 214 are integrated into a single hardware system, as in single core architecture 210 shown in FIG. 2B, bridge 244 is not required since messages may be routed directly to the appropriate protocol stack 212 or 214.

[0031] Referring now to FIGS. 3A, 3B and 3C, interfaces between the mode manager 238 (FIG. 2A) to and from higher level modules of application layer 236 and user interface 234, and the lower level bridge 244 for a dual mode mobile telephone are described. In the architecture 300 shown, the flow of messages for call-related functionality involves user interface (UI) 302, application layers including MSM application layer 304, GSM SMS application layer 306, other application layers 308, and the GSM layers 1/2/3 310. Architecture 300 facilitates reading and writing of call-related data to the CNI (Call Number Information) area of the GSM core 216 (FIG. 2A), and sending of messages with associated structures between the various layers (e.g., the user interface 302 to application layers 304, 306, & 308 and application layers 304, 306 & 308 to GSM layer 1/2/3 310). For TDMA air interface specification related functions, MMI manager 312, which is functionally part of mode manager 238 (FIG. 2A), provides some functionality previously furnished by the GSM Layer 1/2/3 in GSM single mode telephones relating to reading and writing data to the CNI as well as passing structures to and from the application layers. In exemplary embodiments of the invention, MMI manager 312 performs functional actions based on the message it is processing. Such actions include reading data from or writing data to the CNI and a corresponding TDMA structure, followed by sending of the appropriate message to an application layer or the bridge.

[0032] In the embodiment of architecture 300 shown in FIG. 3A, common MSM and SMS application layers 304 & 306 are employed for both GSM and TDMA modes instead of using separate TDMA MSM and SMS application layers, as in the embodiments illustrated in FIGS. 3A and 3B. MMI Manager 312 writes data to the CNI, and passes the current GSM structures to MSM and SMS application layers 304 & 306 when calling the existing message passing functions implemented in MSM application layer. The data written by the MSM application layer to the CNI, and the structures that are passed with those messages are not modified.

[0033] Alternately, in the embodiments of architecture 300 shown in FIGS. 3B and 3C, reverse MSM messages from the user interface 302 (i.e., messages from GSM protocol stack 314 to TDMA protocol stack 316) may be directed to either the GSM MSM application layer 304 or a TDMA MSM application layer 320 through a routing mechanism 322. Similarly, reverse SMS (Short Message Service) messages from MMI 302 are directed to either the GSM SMS application layer 304 or a TDMA SMS application layer 324 via routing mechanism 322. Forward MSM messages from the MMI manager 312 (i.e., messages from TDMA protocol stack 316 to GSM protocol stack 314) are sent to TDMA MSM application layer 320, which communicates the messages to the user interface 302. Forward messages from the GSM MSM application layer 306 are communicated directly to the MMI 302.

[0034] As shown in FIG. 3B, TDMA MSM application layer 320 and TDMA SMS application layer 324 may further provide conversion of data between GSM and TDMA formats required by the respective GSM and TDMA system software. For instance, wherein forward messages are passed from TDMA protocol stack 316 to GSM protocol stack 314, MMI manager 312 may call a function in TDMA MSM application layer 320 and pass the TDMA data structure it receives from bridge 326, which in one embodiment may be a serial interface bridge between TDMA and GSM. The TDMA MSM application layer 320 then fills in fields in the CNI based on data in this structure, and performs MSM functionality. When reverse messages are passed from GSM protocol stack 314 to TDMA protocol stack 316, TDMA MSM application layer 320 converts data from the CNI to assemble a TDMA structure. This structure is then passed through a function interface to MMI manager 312. MMI manager 312 then sends the appropriate message corresponding to the structure to bridge 326, which communicates the message to TDMA MMI manager 328 (i.e., router 242 (FIG. 2A)). TDMA MMI manager 328 then provides the message to TDMA level 2/3 330. Because mapping between TDMA and GSM data is handled within TDMA MSM and SMS application layers 320 & 324, call and message control functionality related to the TDMA air interface may be isolated in these TDMA application layers 320 & 324. In this manner, MMI manager 312 may be isolated in the sense that it will only contain functionality related to interfacing to and from bridge 326. Thus, a modification to a feature of the MMI 302 and application layers 308, 304, 306, 320 & 324 affecting call control or messaging will require little or no modification to the MMI manager 312. Any significant modifications thus take place in the MSM and SMS application layers 304, 306, 320 & 324 instead of both the MSM or SMS application layers 304, 306, 320 & 324 and the MMI manager 312. Thus, modification to the MMI manager 312 may be made necessary only when TDMA messages defined between the GSM and TDMA protocol stacks 314 & 316 are changed.

[0035] Alternately, as shown in FIG. 3C, conversion of data between GSM and TDMA formats required by respective GSM and TDMA system software may be performed by MMI manager 312. In this embodiment, MMI manager writes GSM relevant data to the CNI and passes GSM structures to the MSM and SMS application layers 320 & 324. Thus, messages written by the TDMA MSM and SMS application layers 320 & 324 to the CNI, and the structures that are passed with those messages are not modified. However, the complexity of MMI Manager 312 is increased because the MMI manager 312, and not the TDMA MSM and SMS application layers 320 & 324, provides mapping of the data needed for call control and messaging features.

[0036] Turning now to FIG. 4, an exemplary MMI Manager is described. MMI manager 400 may be logically divided into two components 402 & 404: a first component 402 dealing with forward messages (i.e., messages from the GSM protocol stack to the TDMA protocol stack), and a second component 404 dealing with reverse messages (i.e., messages from the TDMA protocol stack to the GSM protocol stack). Each component 402 & 404 may have an interface to and/or from one or more application layers and the bridge, as well as facilities for translating information between GSM and TDMA formats.

[0037] The forward component of MMI manager 400 may further be divided into four sections 406-412. The first section 406 provides a function interface serving as the link to the serial bridge. The first section 406 is called by the bridge to pass messages to MMI manager 400, passing the TDMA structure corresponding to such messages. The second section 408 processes forward messages based on the TDMA message structure passed to the function interface of first section 406. The second section 408 may be implemented as a function that, in turn, calls a second function corresponding to the TDMA message passed. The third section 410 provides implementation of the functions called by first and second sections 406 & 408 for handling the forward messages. Preferably, a unique function for each forward message may be implemented that will write data to the CNI and assemble any relevant GSM structure based on data in the TDMA structure passed to it. The fourth section 412 interfaces with the application layers. In exemplary embodiments, the fourth section 412 calls functions in application layers appropriate for the GSM message passed.

[0038] The reverse component 404 of MMI manager 400 may similarly be divided into four sections 414-420. The first section 414 provides a function interface with upper application layers sending messages to the MMI manager 400. In exemplary embodiments, first section 414 is implemented as a single function in MMI manager 400, which takes a structure including the type of GSM message and the relevant data. The second section 416 processes reverse messages based on the GSM message structure passed to the function interface of first

section 414. Second section 416 may be implemented as a function that calls a second function corresponding to the GSM message passed. The third section 418 provides implementation of the functions called first and second sections 414 & 416 for handling reverse messages. Preferably, a unique function for each reverse message is implemented for assembling the appropriate TDMA structure based on data in the CN1 and the GSM structure passed to the MMI manager. The fourth section 420 interfaces with the bridge serial link to the TDMA protocol stack, passing the TDMA structure assembled by the first, second and third sections 414, 416 & 418.

[0039] As discussed in the description of FIG. 2, the network or technology selector of mode manager 238 provides the necessary features functionality for basic multi-mode operation (e.g., dual mode GSM/TDMA operation) with "automatic" selection capability between modes based on user-selection. Preferably, the MMI of the mobile telephone is capable of allowing the user to change the preferred technology or network mode for selecting between air interfaces. For instance, as shown in FIG. 5, the user interface of the mobile telephone may provide a menu screen 500 having options 502 that allow a user to select the technology or network mode used by the telephone. In the dual mode system of the embodiment shown, the user may be allowed to select GSM mode ("GSM") 504, TDMA mode ("TDMA") 506, or to allow the system to automatically select a mode based on predetermined criteria ("AUTOMATIC") 508 and network status. Automatic selection between modes is illustrated as being selected in FIG. 5.

[0040] Referring now to FIG. 6, an exemplary method suitable for use by the network selector module of mode manager 238 (FIGS. 2A and 2B) for switching between modes or networks using different air interface standards is described. The method 600 is initiated at step 602 when a user selects a technology mode via the MMI of the mobile telephone. Wherein GSM and TDMA modes are supported by the telephone software architecture, the user may select between GSM mode only, TDMA mode only, or to allow the system to automatically select either GSM or TDMA mode based on network availability or using predetermined selection criteria. In exemplary embodiments, if either GSM mode or TDMA mode is selected, then that mode is used exclusively. The man machine interface (MMI) is monitored for a change in selection. For example, if GSM mode is initially selected, the MMI is monitored for access by the user (e.g., to a technology selection menu) and selection of either TDMA mode, or automatic mode switching. If service using the selected mode is determined to be unavailable, a message may be provided to the user informing the user of the absence of service using the selected mode. If automatic selection of modes is selected at step 604, a determination is made at step 606 whether switching from the selected mode to the non-selected mode is necessary. For instance, the system may periodically receive indications as to the availability of service from the protocol stack corresponding to the mode selected. If an indication that service is no longer available using the selected mode is received, or that service is now available using the non-selected mode and that mode is preferred over the currently selected mode, switching is initiated between modes at step 608. A timer may be provided for triggering periodic checking for the availability of the non-selected technology. For example, if GSM mode is selected and a user enters an area where GSM service is unavailable, the telephone may automatically switch to TDMA mode, to provide uninterrupted service. Similarly, if TDMA mode is being used by the mobile telephone because the preferred mode (GSM) is unavailable, an indication that GSM mode has become available may cause the mobile telephone to switch to GSM mode.

[0041] In exemplary embodiments of the invention, the system may provide for emergency calls on both GSM and TDMA modes. Thus, if an emergency call is originated, the system may check the current technology mode and available service. If there is any service (either full or limited service) in the selected mode (GSM or TDMA), the system may make the emergency call. If there is no service found in the selected mode or technology, the system may switch to the currently non-selected mode, and attempt to obtain service. If automatic selection between modes is selected, the system may buffer the call number and search for available service. Again, if no service is found in one mode, the system may switch modes to find service.

[0042] Referring now to FIGS. 7 and 8, an exemplary bridge for providing inter-processor communication (IPC) between processors of chipsets in a multi-mode mobile telephone is described. Bridge 700, which may have a structure that is characteristic of the bridge 244 utilized by dual core architecture 200 shown in FIG. 2A, may utilize an OSI (Open Systems Interconnect) model 800 generally illustrated in FIG. 8. Using this model, each of the GSM and TDMA components 702 & 704 or processes of bridge 700 is comprised of a first or physical layer ("Layer 1") 706. In exemplary embodiments, physical layer 706 includes serial driver 708 for performing reception and transmission of serial data over serial connection 710 using BFB protocol. A second layer ("Layer 2") 712 disposed over the physical layer 706 includes a segmentation and re-assembly mechanism (SAR) 714 for providing reliable transmission and distribution of data. A third layer ("Layer 3") 716, disposed on top of the second layer 712, supports application modules providing internal communication within bridge 700. Such application modules include the MMI Manager (see FIG. 4) and applications modules for communicating with the GSM processor or TDMA processor (e.g., GSM processor communicator, and the like). Such applications may use the services of bridge 700 for exchange of data between protocol stacks running on GSM and TDMA chipsets within the mobile telephone.

odically receive indications as to the availability of service from the protocol stack corresponding to the mode selected. If an indication that service is no longer available using the selected mode is received, or that service is now available using the non-selected mode and that mode is preferred over the currently selected mode, switching is initiated between modes at step 608. A timer may be provided for triggering periodic checking for the availability of the non-selected technology. For example, if GSM mode is selected and a user enters an area where GSM service is unavailable, the telephone may automatically switch to TDMA mode, to provide uninterrupted service. Similarly, if TDMA mode is being used by the mobile telephone because the preferred mode (GSM) is unavailable, an indication that GSM mode has become available may cause the mobile telephone to switch to GSM mode.

The third layer 716 may further provide applications for external communication. Such applications may include a PCAT (Phone Calibration, Adjust and Test) application, a data logger application, fax and data channel applications, and the like.

[0043] Fig. 9 illustrates the structure used for MMI specific messages employed by the third layer ("Layer 3") 716 shown in FIG. 7. As shown, an MMI specific message 900 may include elements of different types. For example, an MMI message 900 may include mandatory fixed length elements 902, mandatory variable length elements 904, optional fixed length elements 906 and optional variable length elements 908. In exemplary embodiments, mandatory fixed length elements 902 and mandatory variable length elements 904 are used primarily for IPC communications. Inter processor control man machine interface (IPC MMI) messages may further comprise call processing forward messages (TDMA-GSM), call processing reverse messages (GSM-TDMA), database access forward messages, database access reverse messages, built-in monitor messages, response messages, and the like.

[0044] It is believed that the of the present invention and many of its attendant advantages will be understood by the foregoing description, and it will be apparent that various changes may be made in the form, construction and arrangement of the exemplary components thereof without departing from the scope of the invention or without sacrificing all of its material advantages. The form herein before described being merely an explanatory embodiment thereof, it is the intention of the following claims to encompass and include such changes.

Claims

1. A system (200 & 210) for controlling a mobile telephone (100 & 110), comprising:

a mode manager (238) for managing switching of the system (200 & 210) between a first mode utilizing a first air interface standard supported by a first protocol stack (212) and a second mode utilizing a second air interface standard supported by a second protocol stack (214);
 a user interface (234) for communicating information and commands between the first and second protocol stacks (212 & 214) and a user for controlling the mobile telephone (100 & 110); and
 an application layer (236) for reducing functional interface between the first and second protocol stacks (212 & 214) to layers of the first and second protocol stacks (212 & 214) subsequent to the user interface (234),

wherein control of the mobile telephone (100 & 110) is provided via a single man machine interface that

is substantially consistent across the first and second modes.

2. A system (200 & 210) for controlling a mobile telephone (100 & 110), comprising:

a first protocol stack (212) for supporting a first air interface standard providing a first functionality;
 a second protocol stack (214) for supporting a second air interface standard providing a second functionality;
 a mode manager (238) for managing switching of the system between a first mode utilizing the first air interface standard and a second mode utilizing the second air interface standard;
 a user interface (234) for communicating information and commands between the first and second protocol stacks (212 & 214) and a user for controlling the mobile telephone (100 & 110); and
 an application layer (236) for reducing functional interface between the first and second protocol stacks (212 & 214) to layers of the first and second protocol stacks (212 & 214) subsequent to the user interface (234),

wherein control of the first and second functionalities is provided via a single man machine interface that is substantially consistent across the first and second modes.

3. A system (200 & 210) according to claim 1 or 2, wherein the mode manager (238) further includes a router (322) for routing information to one of the first protocol stack (212) and the second protocol stack (214).
4. A system (200 & 210) according to claim 1, 2 or 3, wherein the mode manager (238) further includes a man machine interface manager (312) for translating information between the first air interface standard and the second air interface standard.
5. A system (200 & 210) according to any of the preceding claims, further comprising a bridge (244) for providing communication of information between the first protocol stack (212) and the second protocol stack (214).
6. A system (200 & 210) according to any of the preceding claims, further characterized by a common database for storage of user data utilized by the first and second protocol stacks (212 & 214), the user data including at least one of an address book entry, a phonebook entry, a short message, an email, a ringing tone, and a picture.

7. A system (200 & 210) according to any of the preceding claims, further **characterized by** a call database for storing call related data by the first and second protocol stacks (212 & 214).
8. A system (200 & 210) according to any of the preceding claims, wherein the first air interface standard is the Global System for Mobile communication (GSM) air interface standard and the second air interface standard is the Telecommunications Industry Association/Electronics Industry Alliance Interim Standard 136 (TIA/EIA-136) air interface standard.
9. A system (200 & 210) according to any of the preceding claims, wherein the user interface (234), application layer (236), and mode manager (238) are integrated with the first protocol stack (212).
10. A system (200 & 210) according to claim 1 or 2, wherein the mode manager (238) further includes a man machine interface manager (312) for translating information between the first air interface mode (212) and the second air interface mode (214).
11. A system (200 & 210) according to claim 1 or 2, further **characterized by** a database for storage of data by the first and second protocol stacks (212 & 214).
12. A mobile telephone (100 & 110), comprising:
 a hardware system including at least one chipset (112, 114 & 116) and a hardware interface for controlling the mobile telephone (100 & 11);
 a software system, including:
 a mode manager (238) for managing switching between a first mode utilizing a first air interface standard supported by a first protocol stack (212) and a second mode utilizing a second air interface standard supported by a second protocol stack (214), the first and second protocol stacks (212 & 214) running on the at least one chipset (112, 114 & 116);
 a user interface (234) for communicating information and commands between the first and second protocol stacks (212 & 214) and a user via the hardware interface; and
 an application layer (236) for reducing functional interface between the first and second protocol stacks to layers of the first and second protocol stacks subsequent to the user interface,
- wherein the user interface (234) provides control of the mobile telephone via a single man machine interface (118) that is substantially consistent across the first and second modes.
13. A mobile telephone (100 & 110) according to claim 12, wherein the mode manager (238) further includes a router (322) for routing information to one of the first protocol stack (212) and the second protocol stack (214).
14. A mobile telephone (100 & 110) according to claim 12 or 13, wherein the mode manager (238) further includes a man machine interface manager (312) for translating information between the first air interface standard and the second air interface standard.
15. A mobile telephone (100 & 110) according to claim 12, 13 or 14, further comprising a bridge (244) for providing communication of information between the first protocol stack (212) and the second protocol stack (214), wherein the first protocol stack (212) and the second protocol stack (214) are run on separate chipsets (112 & 114).
16. A mobile telephone (100 & 110) according to any of claims 12 to 15, further comprising a database for storage of data by the first and second protocol stacks (212 & 214).
17. A mobile telephone (100 & 110) according to any of claims 12 to 16, further comprising a call database for storing call related data by the first and second protocol stacks (212 & 214).
18. A mobile telephone (100 & 110) according to any of claims 12 to 17, wherein the first air interface standard is the Global System for Mobile communication (GSM) air interface standard and the second air interface mode is the Telecommunications Industry Association/Electronics Industry Alliance Interim Standard 136 (TIA/EIA-136) air interface standard.
19. A mobile telephone (100 & 110) according to any of claims 12 to 18, wherein the user interface (234), application layer (236), and mode manager (238) are integrated with the first protocol stack (212)

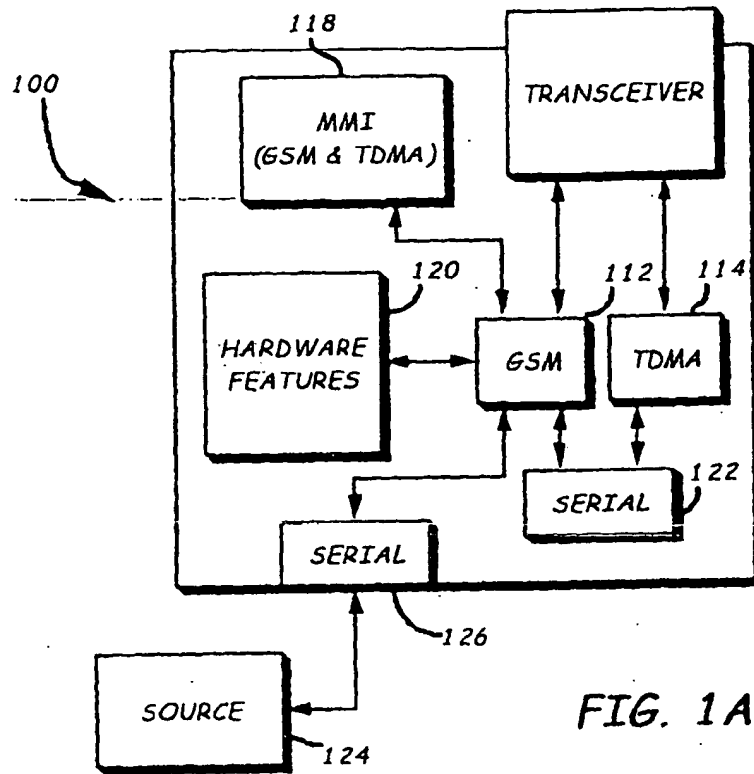


FIG. 1A

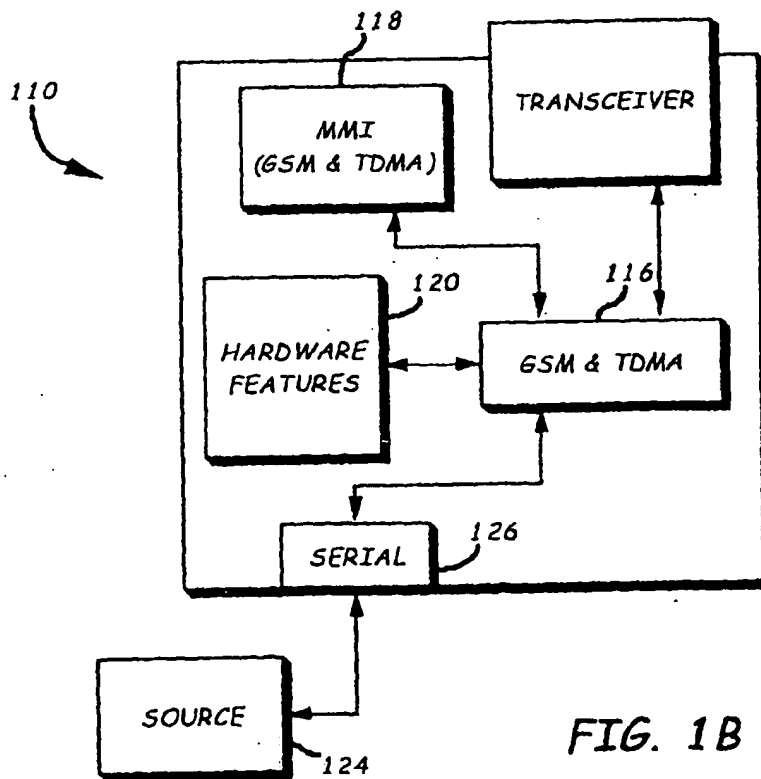


FIG. 1B

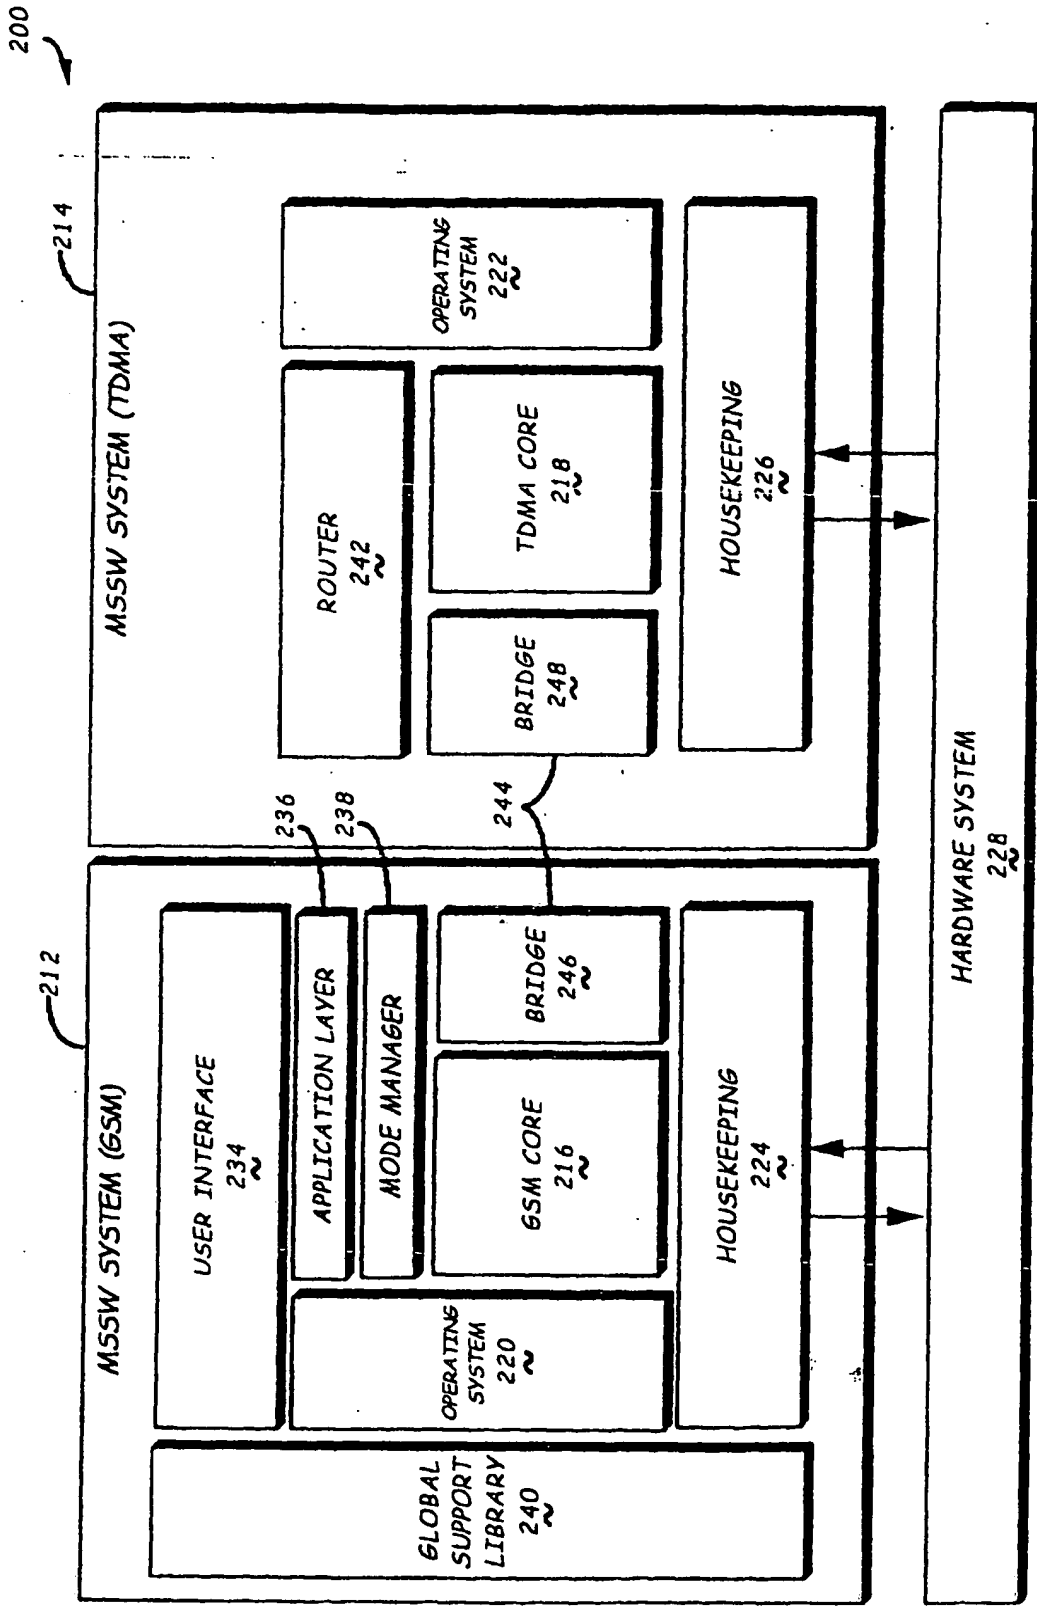


FIG. 2A

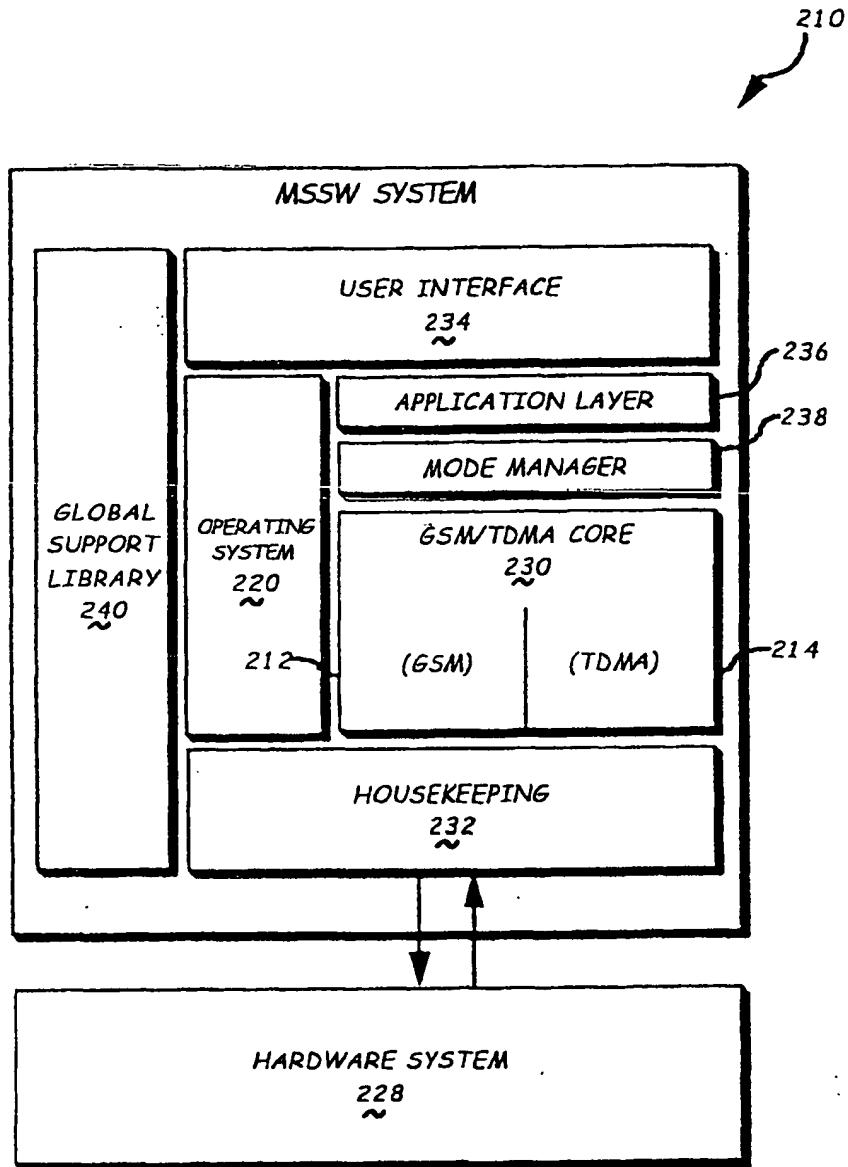


FIG. 2B

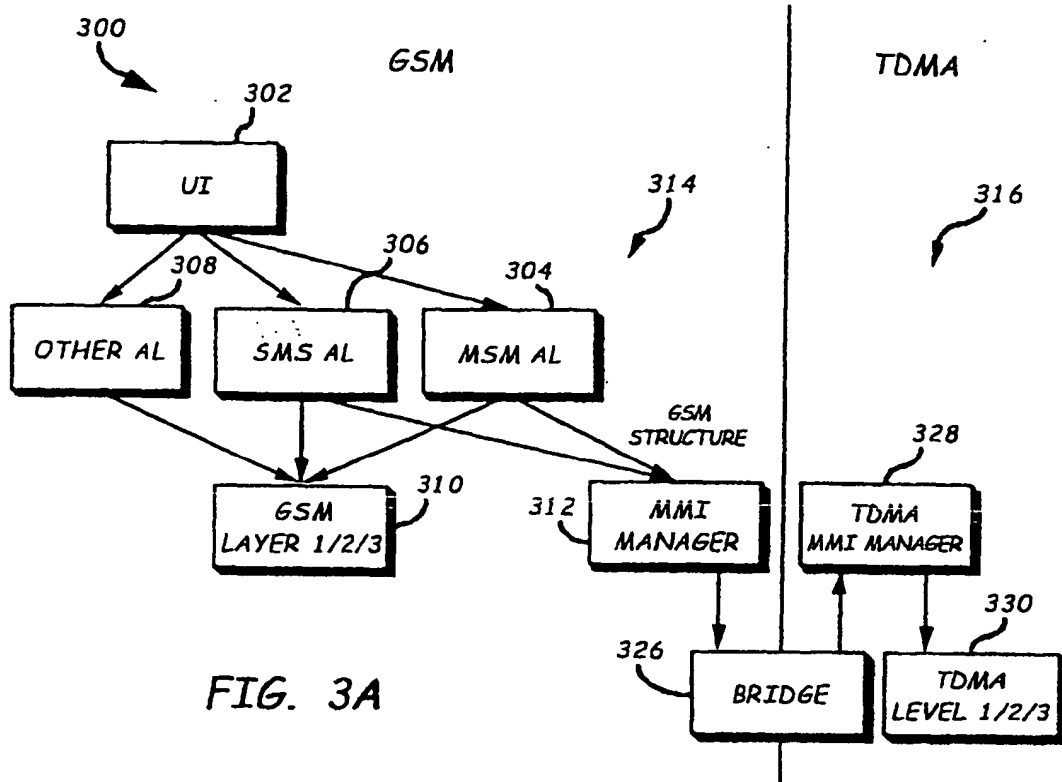


FIG. 3A

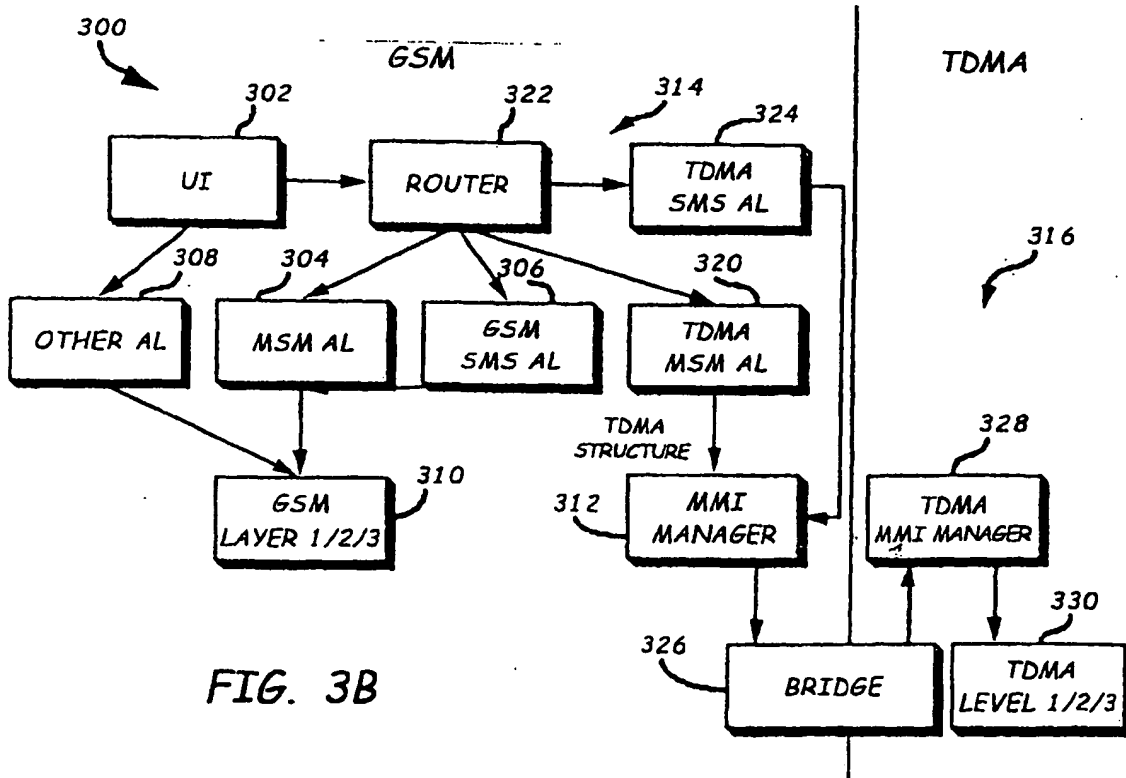


FIG. 3B

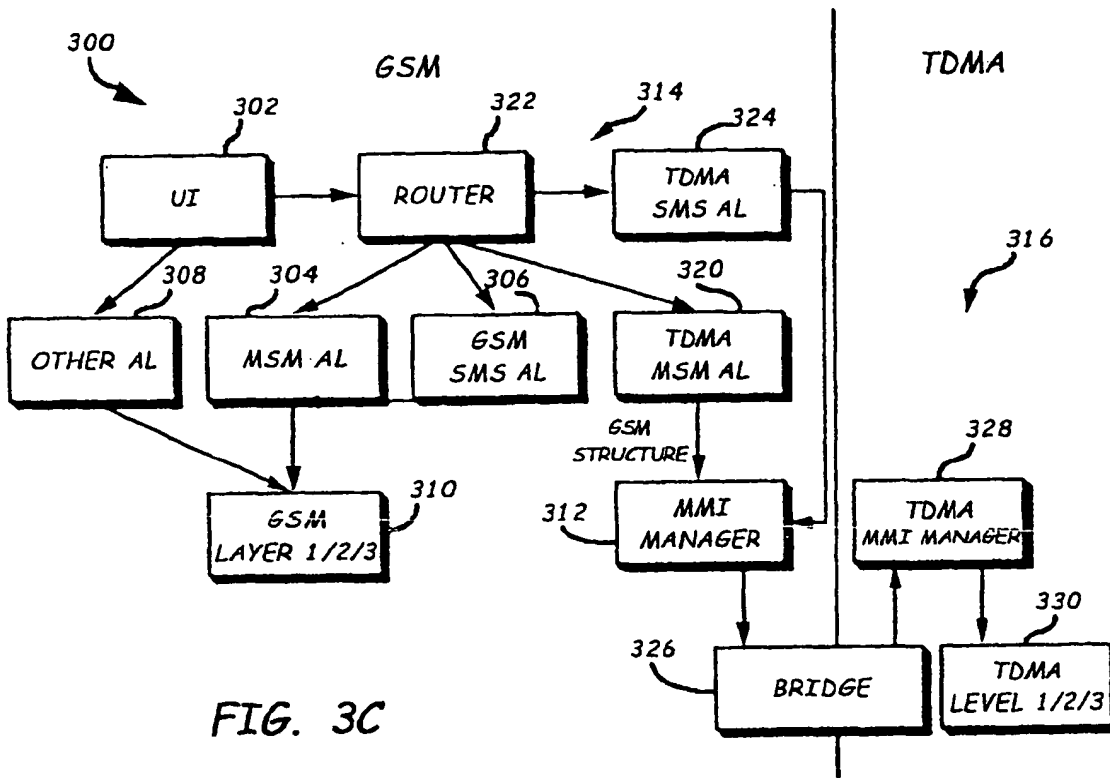


FIG. 3C

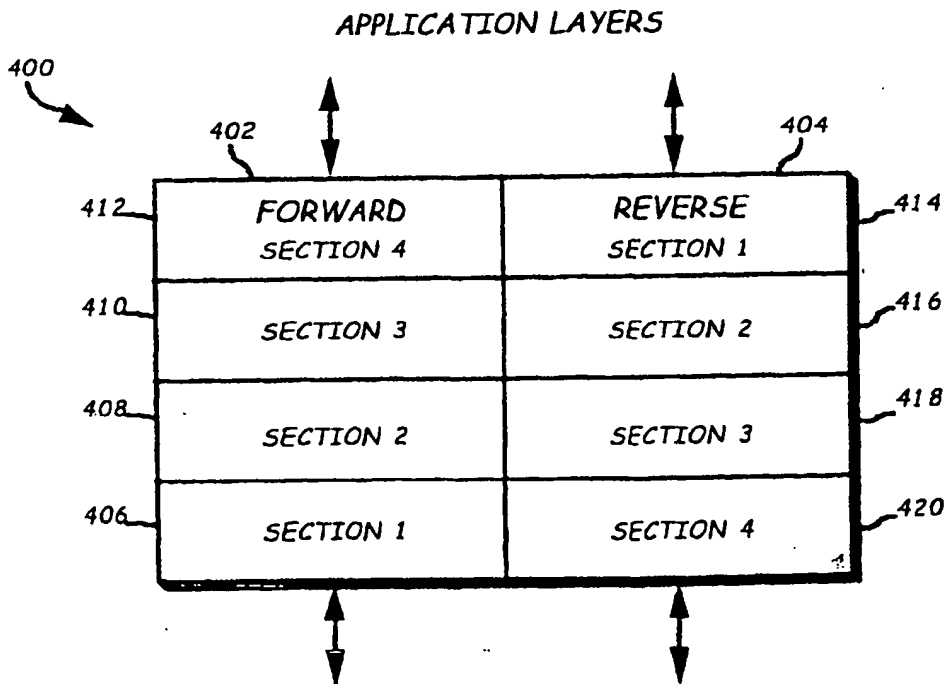


FIG. 4

BRIDGE

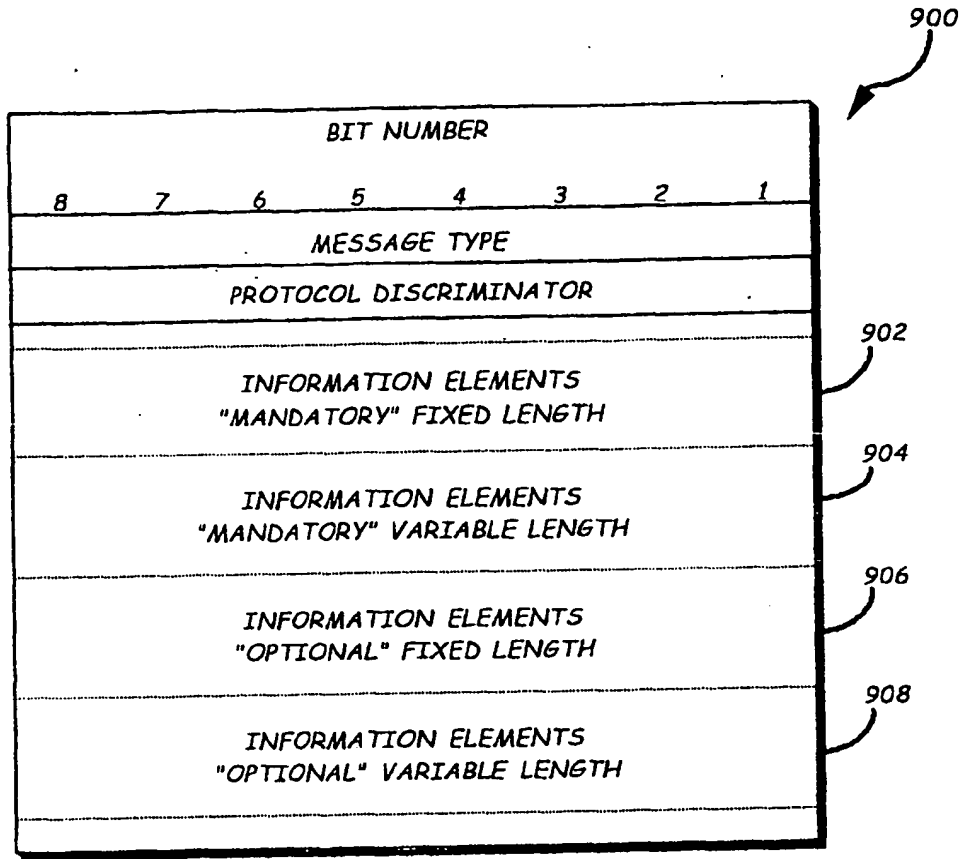


FIG. 9



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 1659

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X A	WD 00 77940 A (ERICSSON INC) 21 December 2000 (2000-12-21) * page 4, line 11-23 * * page 6, line 23 - page 7, line 2; figure 2 * * page 9, line 10-13 * * page 10, line 22 - page 11, line 6 *	1-4,6,8, 10, 12-14, 16,18 5,7,9, 11,15, 17,19	H04Q7/32 H04B1/40
X A	EP 0 852 448 A (NOKIA MOBILE PHONES LTD) 8 July 1998 (1998-07-08) * column 2, line 15-22 * * column 4, line 17-35; figure 2 * * column 5, line 49 - column 6, line 45; figures 5.6 *	1-3,12, 13 4-11, 14-19	
X A	US 6 138 010 A (RABE DUANE C ET AL) 24 October 2000 (2000-10-24) * column 7, line 1 - column 8, line 9; figure 3 *	1-3,8, 12,13,18 4-7, 9-11, 14-17,19	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q H04B H04M
A	US 6 173 316 B1 (DE BOOR ADAM ET AL) 9 January 2001 (2001-01-09) * column 8, line 20 - column 9, line 37; figure 1 *	1,2,12	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 3 July 2002	Examiner Mö11, H-P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1502 03 82 (P04C31)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 02 25 1659

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-07-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0077940	A	21-12-2000	AU 5021500 A	02-01-2001
			EP 1192725 A1	03-04-2002
			TR 200103629 T2	21-05-2002
			WO 0077940 A1	21-12-2000
EP 0852448	A	08-07-1998	EP 0852448 A1	08-07-1998
			AU 6091898 A	31-07-1998
			BR 9713654 A	04-04-2000
			CN 1249113 A	29-03-2000
			WO 9830042 A2	09-07-1998
			EP 0950330 A2	20-10-1999
			JP 2000513901 T	17-10-2000
			US 5946634 A	31-08-1999
US 6138010	A	24-10-2000	AU 5969098 A	12-11-1998
			BR 9806491 A	21-12-1999
			CN 1199996 A	25-11-1998
			DE 19819422 A1	12-11-1998
			FR 2763462 A1	20-11-1998
			GB 2327016 A	06-01-1999
			JP 10336757 A	18-12-1998
			PL 326148 A1	09-11-1998
			SG 71108 A1	21-03-2000
			US 6173316	B1
EP 1152332 A2	07-11-2001			
EP 1152333 A2	07-11-2001			
EP 1070288 A1	24-01-2001			
JP 2002510819 T	09-04-2002			
WO 9952032 A1	14-10-1999			
US 6317781 B1	13-11-2001			
US 2002078143 A1	20-06-2002			